

Ururu Sarara

To enjoy year-round comfort, you need more than just temperature control, you need control over the humidity level, combined with the supply of fresh clean air. Daikin's new Ururu Sarara, with its perfect combination of humidification, dehumidification, ventilation and purification provides exactly the room comfort you want, any time of the year. A bit of humidification in winter avoids sore throats and dry skin. Dehumidification in summer makes you feel more comfortable even with higher temperatures. Besides that, the Ururu Sarara brings in fresh air, but not without removing dust, pollen and smoke thanks to the special air purification techniques.

5 Air treatment techniques in 1 system

Cooling & heating, ventilation, air purification, humidification and dehumidification.

Low environmental impact

With an SEER & SCOP of A+++ on the entire range and by using a low GWP refrigerant, R32 GWP is approximately one third of R-410A GWP, Daikin Ururu Sarara delivers a lower environmental impact.

SEER + SCOP

A+++


on the entire range



Total comfort solution

Thanks to its auto-cleaning filter, an improved air flow pattern 2-area intelligent eye and its user friendly remote control.

NEW

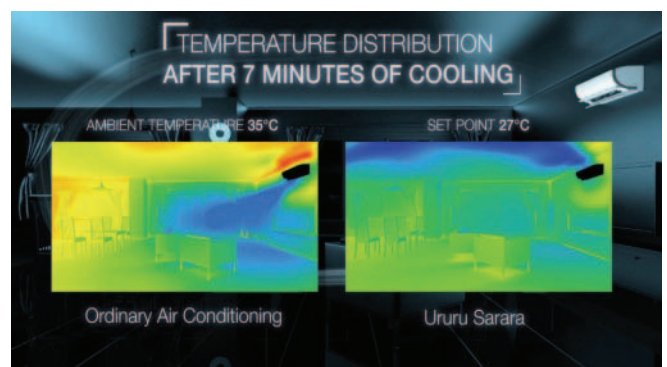

Award winning design

Daikin Ururu Sarara has been awarded with the prestigious Reddot design award 2013



FTXZ-N



RXZ-N



reddot design award
winner 2013



- › SEER + SCOP = A+++ on the entire range
- › Unique combination of humidification, dehumidification, ventilation, air purification and heating & cooling in 1 system
- › Enhanced comfort thanks to 2- area intelligent eye, improved airflow pattern and user friendly control
- › Reddot design award winner 2013
- › Online controller (optional): control your indoor unit from any location via smartphone, laptop, pc, tablet or touch screen
- › First R32 air-to-air heat pump in the European market



Heating & Cooling

Indoor unit				FTXZ25N	FTXZ35N	FTXZ50N
Cooling capacity	Min./Nom./Max.		kW	0.6/2.5/3.9	0.6/3.5/5.3	0.6/5.0/5.8
Heating capacity	Min./Nom./Max.		kW	0.6/3.6/7.5	0.6/5.0/9.0	0.6/6.3/9.4
Power input	Cooling	Min./Nom./Max.	kW	0.11/0.41/0.88	0.11/0.66/1.33	0.11/1.10/1.60
	Heating	Min./Nom./Max.	kW	0.10/0.62/2.01	0.10/1.00/2.53	0.10/1.41/2.64
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A+++		
		Pdesign	kW	2.50	3.50	5.00
		SEER		9.54	9.00	8.60
		Annual energy consumption	kWh	92	136	203
	Heating (Average climate)	Energy label		A+++		
		Pdesign	kW	3.50	4.50	5.60
		SCOP		5.90	5.73	5.50
		Annual energy consumption	kWh	831	1,100	1,427
Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load)	EER		6.10	5.30	4.55	
	COP		5.80	5.00	4.47	
	Annual energy consumption	kWh	205	330	550	
Casing	Energy label		A/A			
	Colour	Cooling/Heating	White			
Dimensions	Unit	HeightxWidthxDepth	mm			
Weight	Unit	kg				
Fan - Air flow rate	Cooling	High/Nom./Low/Silent operation	m ³ /min			10.7/7.5/5.3/4.0
	Heating	High/Nom./Low/Silent operation	m ³ /min			11.7/8.6/6.7/4.8
Sound power level	Cooling	High	dBA			54
	Heating	High	dBA			56
Sound pressure level	Cooling	High/Nom./Low/Silent operation	dBA			38/33/26/19
	Heating	High/Nom./Low/Silent operation	dBA			39/35/28/19
Piping connections	Liquid	OD	mm			
	Gas	OD	mm			
Power supply	Phase / Frequency / Voltage		Hz / V			
				1~ / 50 / 220-240		

Outdoor unit				RXZ25N	RXZ35N	RXZ50N
Dimensions	Unit	HeightxWidthxDepth	mm			
Weight	Unit	kg				
Fan - Air flow rate	Cooling	High/Low	m ³ /min			31.0/22.5
	Heating	High/Low	m ³ /min			28.3/16.2
Sound power level	Cooling	High	dBA			59
Sound pressure level	Cooling	High	dBA			46
	Heating	High	dBA			46
Operation range	Cooling	Ambient	Min.~Max.	°CDB		
	Heating	Ambient	Min.~Max.	°CWB		
Refrigerant	Type/GWP		R32/650			
Piping connections	Piping length	OU - IU	Max.	m		
	Level difference	IU - OU	Max.	m		
Power supply	Phase / Frequency / Voltage		Hz / V			
Current - 50Hz	Maximum fuse amps (MFA)		A			
				1~ / 50 / 220-240		
				-		

(1) EER/COP according to Eurovent 2012